

SCSI CARD | 1520

ISA card for desktop PCs

Product Benefits

- Gain super performance: 10 MB/sec data transfer rate
- Install with Plug-and-Play ease
- Achieve broadest compatibility
- Connect up to 7 SCSI peripherals with one card
- Manage peripherals with Adaptec® EZ-SCSI® software
- Make high-quality CDs with Easy CD Creator™ software


Boost Your CD-Recordable or Jaz Drive To Its Best Performance

Speed Up Your System With SCSI
SCSI* moves information between your PC and peripheral much faster than with standard interfaces. With SCSI, you'll save time with transfers up to 6 times faster than with a parallel port connection.

Install With Plug-and-Play Ease
Installation is a breeze. Just remove your computer's case, slide the card into an ISA expansion slot, and connect the SCSI peripherals. You'll be up and running in no time.

Achieve Broadest Compatibility
Adaptec SCSI Cards are tested with hundreds of computer systems and peripherals to ensure the widest possible support, now and in the future. And since peripheral manufacturers design to Adaptec products, you can count on broad compatibility.

Upgrade Your PC Quickly
SCSI makes it easy to add a peripheral to your system. Daisy-chain up to 7 internal or external peripherals to this SCSI Card and enjoy the same great performance. This SCSI Card is ideal for connecting SCSI CD-R, CD-ROM, or removable drives, and can be used to connect other Fast SCSI peripherals like scanners, tape, and hard disk drives.

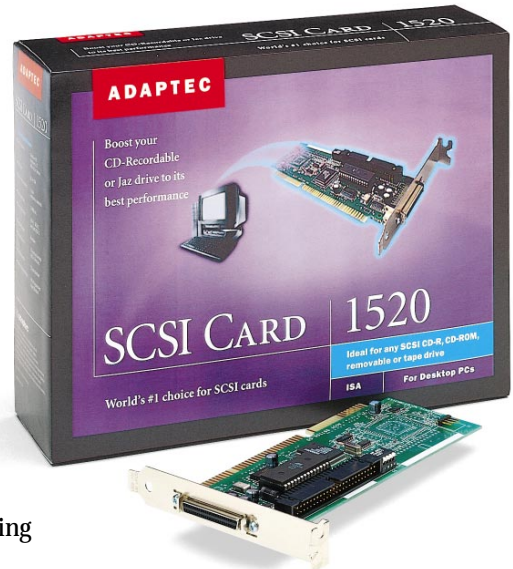

Manage Peripherals With Adaptec EZ-SCSI Software
EZ-SCSI software takes you step-by-step through the installation process and provides a full suite of applications for maximizing your SCSI peripherals, playing CDs, backing up with tape, and scanning documents.

Make High-Quality CDs With Easy CD Creator Software
Easy CD Creator software helps you easily record your own data or audio CDs—distribute your presentations, back up your financial data, or record your favorite music with your CD-R drive.

Trust Adaptec—The World's #1 Choice For SCSI Cards
Adaptec is the industry standard in SCSI Cards. And all Adaptec SCSI Cards are backed by a 5-year, limited warranty and full technical support for two years.

*SCSI stands for Small Computer System Interface and is pronounced "scuzzy".

SCSI CARD | 1520

Adaptec, Inc.
691 South Milpitas Boulevard
Milpitas, California 95035
Tel: (408) 945-8600
Fax: (408) 262-2533

Adaptec Europe - Belgium
Tel: (32) 2-352-34-11
Fax: (32) 2-352-34-00

Adaptec Japan - Tokyo
Tel: (81) 3-5365-6700
Fax: (81) 3-5365-6950

Adaptec Singapore
Tel: (65) 278-7300
Fax: (65) 273-0163

Literature:
1-800-934-2766 (USA and Canada)
or (510) 732-3829

Pre-Sales Support:
1-800-442-7274 (USA and Canada)
or (408) 957-7274

World Wide Web:
<http://www.adaptec.com>

Internet ftp server: <ftp.adaptec.com>
Adaptec USA Bulletin Board
Service (BBS): (408) 945-7727
(up to 28,800 baud, using 8 bits,
1 stop bit, no parity)

Interactive Fax: (303) 684-3400

Copyright 1997 Adaptec, Inc. All rights reserved.
Adaptec, the Adaptec logo, the Adaptec tagline,
EZ-SCSI, Easy CD Creator and AHA are trademarks of
Adaptec, Inc., which may be registered in some jurisdic-
tions. Windows, Windows 95, the Windows 95 logo and
Windows NT are registered trademarks of Microsoft
Corporation, used under license. All other trademarks
used are owned by their respective owners.

Information supplied by Adaptec, Inc., is believed to
be accurate and reliable at the time of printing, but
Adaptec, Inc., assumes no responsibility for any errors
that may appear in this document. Adaptec, Inc.,
reserves the right, without notice, to make changes in
product design or specifications. Information is subject
to change without notice.

P/N 980344-011 8/97 Printed in U.S.A.

Technical Specifications

Operating Systems:	Windows® 95, Windows® 3.1, DOS
PC Bus Type:	16-bit ISA
Total Devices Supported:	7 total (internal or external)
Data Transfer Rate:	10 MB/sec
Supported Protocols:	SCSI-1, SCSI-2 and Fast SCSI-2
Boot Support:	On-board BIOS
External Connector:	50-pin high-density (SCSI-2 female)
Internal Connector:	50-pin standard (male)
Interface Transfer Method:	PIO (Programmed Input/Output)

Card Size:	4.75" W x 7" L
Package Size:	7.75" H x 11.5" W x 2.88" D
Weight:	1.5 lbs.
UPC:	7 60884 12923 4

System Requirements

- IBM-compatible PC-386 or above
- Windows 95, Windows 3.1, or DOS operating system
- ISA expansion slot
- SCSI peripheral

Package Includes

- AHA®-1520 SCSI Card
- EZ-SCSI software
- Easy CD Creator software (standard edition)
Note: Software may be used with Windows 95 or
Windows NT® 4.0 operating systems only
- 50-pin internal SCSI cable (external cable not included)
- Quick installation guide
- Reference guide
- Registration card